

Rec'd PCT

03 DEC 2004

PCT/GB 2003 / 0 0 2 4 1 6



GB03/02416




INVESTOR IN PEOPLE

# **PRIORITY DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ




I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

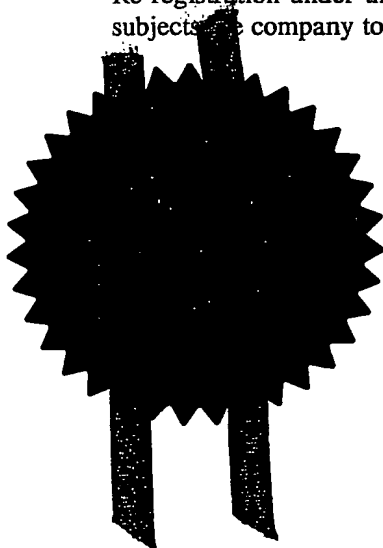

Signed

Dated

18 June 2003

An Executive Agency of the Department of Trade and Industry

**Best Available Copy**

Patents Form 1/77

Patents Act 1977  
(Rule 1)



08JUN02 E724291-7 D01821  
P01/7700-0400-0213133.2

## Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference

Jg-2859

2. Patent application number

(The Patent Office will fill in this part)

07 JUN 2002

0213133.2

3. Full name, address and postcode of the or of each applicant (underline all surnames)

08398414001  
Patents ADP number (if you know it)

IMWRO LTD  
PO Box 95,  
2a Lord Street,  
Douglas,  
Isle of Man,  
IM99 1HP

If the applicant is a corporate body, give the country/state of its incorporation

Isle of Man

4. Title of the invention

APPARATUS FOR WARMING A TYRE ON A WHEEL  
TO A TEMPERATURE REQUIRED FOR VEHICLE RACING

5. Name of your agent (if you have one)

Graham Jones & Company

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

77 Beaconsfield Road,  
Blackheath,  
London  
SE3 7LG

Patents ADP number (if you know it)

2097001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

YES

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description	8
Claim(s)	3
Abstract	1
Drawing(s)	2 + 2

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77) 3

Request for preliminary examination and search (Patents Form 9/77)


Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature



Date 07/06/02

12. Name and daytime telephone number of person to contact in the United Kingdom

Mr. G. H. Jones 020 8858 4039

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

**APPARATUS FOR WARMING A TYRE ON A WHEEL**  
**TO A TEMPERATURE REQUIRED FOR VEHICLE RACING**

This invention relates to apparatus for warming a tyre on a wheel to a temperature required for vehicle racing.

In competitive motor sports, it is well known that the temperature of tyres directly affects the adhesion of the tyres to a surface such for example as a racing track surface. The temperature of the tyres is either raised naturally during a race, or is achieved artificially by the use of thermally heated covers which are placed over the tyres and which are removed prior to actual racing.

If the tyres are left to heat naturally during a race, there will self-evidently be a period during the beginning of the race when the tyres are below the optimum temperature giving optimum surface adhesion. The use of the thermally heated covers enables the tyres to be heated prior to actual racing but the thermally heated covers are slow in terms of their speed of heating of the tyres, and they are also limited in terms of depth of penetration of heat into the tyres, this heating penetration being limited to surface contact conduction. Thus the use of thermally heated covers often leaves a tyre with an insufficient temperature, especially during race pit stops. This means that valuable time can be lost whilst the tyre heats naturally during race conditions.

It is an aim of the present invention to obviate or reduce the above mentioned problems.

Accordingly, in one non-limiting embodiment of the present invention there is provided apparatus for warming a tyre on a wheel to a temperature required for vehicle racing, which apparatus comprises a container in which the tyre is heated, mounting means which is positioned in the container and on which the wheel is mounted, generator means for generating electromagnetic energy of a frequency that heats the tyre, temperature indicator means for indicating the temperature of the tyre, and control means for controlling the operation of the apparatus such that the tyre is controllably heated to a temperature required for vehicle racing.

The apparatus of the present invention may be used on a wide variety of tyres for use in vehicle racing. Thus the tyres may be used on vehicles such for example as racing cars, motor cycles and go-karts. The apparatus of the present invention may provide a means of both speedily and evenly heating the tyre. The use of the chosen electromagnetic energy may enable speedy and deep heat penetration to take place. The apparatus of the invention is able to be such that it can be conveniently transported to a race site. The apparatus of the invention is also such that it can be easily and safely operated in order to heat the tyre on the wheel to the required temperature.

The apparatus of the invention may include rotator means for rotating the wheel in order to ensure even heating of the tyre in the container. The rotator means may be a turntable and a drive motor.

The apparatus may be one in which the container is of a size suitable for receiving only one wheel at a time. This ensures that the apparatus is able to be kept small for portability, and it also ensures that a tyre can quickly be inserted and removed from the apparatus. If desired, the container may be such that more than one wheel may be heated at a time.

Usually, the container will be constructed for quick opening in order to provide ease of access to the wheel to facilitate speedy insertion and removal of the wheel from the container as may be required during racing conditions. The container may thus comprise a body and a door which allows full access to the inside of the body.

Usually the container will be a circular container but containers of other shapes may be employed if desired.

The apparatus may be one in which the mounting means includes studs on which the wheel is placed. The mounting means may be any suitable and appropriate quick-locking and quick-release mounting means.

The wheel may be horizontally mounted in the container. Alternatively, the wheel may be vertically mounted in the container. The exact mounting position of the wheel will normally be chosen in order to facilitate ease of entry and removal of the wheel into the container.

The generator means may be for generating microwave energy as the electromagnetic energy. The microwave energy may be such that it meets one of four permissible industrial scientific and medical frequency bands for microwave heating. The microwave energy may be at a microwave frequency power of 2450 MHz. The microwave energy may be

generated from generator means in the form of a conventional magnetron valve and wave guide assembly, or from a solid-state microwave coupling power generation electronic component arrangement.

The apparatus may alternatively be one in which the generator means is for generating radio frequency energy as the electromagnetic energy. The radio frequency energy employed may meet one of the three permissible industrial scientific and medical frequency bands for dielectric heating. Preferably the radio frequency power is of 13.56 Mhz. This radio frequency energy may be generated using solid state power generating electronic components.

Any suitable and appropriate temperature indicator means may be employed for indicating the temperature of the tyre. Thus, for example, various methods of remote temperature sensing of the tyre may be employed. Preferably the remote temperature sensing of the tyre utilises infrared sensing, allowing overall heating to be determined on previously established compound surface temperature requirements, based on the material's dielectric loss tangent and electrical conductivity determination.

The apparatus of the invention may be such that metal components form an active part of the apparatus. The apparatus of the present invention may be able to accommodate the use of metal structures, such as the wheel hub, as either an extension of the microwave cavity or as part of the radio frequency applicator. It can also be used for specific energy shielding purposes, especially where tyres having compounds of different dielectric properties and electrical conductivity are envisaged.

The apparatus of the invention is preferably constructed to be easily portable. Thus the apparatus can be used to safely generate and contain high frequency heating energy at a track side, using conveniently placed static or mobile electrical supplies, of either AC or DC electrical voltage supply. The AC voltage supply may be compatible with the specific voltage and frequency at a particular race venue, or it may be achieved through a separately mobile generator. The DC supply may be via a typical motor sport battery power pack system.

The apparatus of the present invention may use electromagnetic compatible suppression techniques. The electromagnetic energy distribution within the apparatus of the invention can be achieved by static means as an alternative to the above mentioned rotator means for rotating the wheel.

The apparatus of the present invention can be arranged to operate easily in pit lanes and at race track starting grids.

Embodiments of the invention will now be described solely by way of example and with reference to the accompanying drawings in which:

Figure 1 shows first apparatus for warming a tyre on a wheel to the temperature required for vehicle racing;

Figure 2 shows second apparatus for warming a tyre on a wheel to a temperature required for vehicle racing;

Figure 3 shows third apparatus for warming a tyre on a wheel to a temperature required for vehicle racing; and



Figure 4 shows fourth apparatus for warming a tyre on a wheel to a temperature required for vehicle racing.

Referring now to Figure 1, there is shown apparatus 2 for warming a tyre 4 on a wheel 6. The tyre 4 is able to be warmed to a temperature required for vehicle racing. The apparatus 2 comprises a container 8 in which the tyre 4 is heated. The apparatus 2 also comprises mounting means 10 which is positioned in the container as shown and on which the wheel 6 is mounted. More specifically, the wheel 6 comprises a hub 12 and this hub 12 is mounted on an upstanding stud 14 forming part of the mounting means 10.

The apparatus 2 includes generator means 16 for generating electromagnetic energy of a frequency that heats the tyre 4. Temperature indicator means 18 are provided for indicating the temperature of the tyre 4. Control means (not shown) are provided for controlling the operation of the apparatus 2 such that the tyre 4 is controllably warmed to a temperature required for vehicle racing.

The apparatus 2 includes rotator means 20 for rotating the wheel 6 in order to ensure even heating of the tyre 4 in the container 8.

The container 8 is of a size suitable for receiving only one wheel 6 at a time. The container 8 is constructed for quick opening in order to provide easy access to the wheel 6 to facilitate speedy insertion and removal of the wheel 6 from the container 8 as may be required during racing conditions. It will be seen that the container 8 comprises a body 22 and a door 24. The

door 24 allows full access to the inside of the body 2. The door 24 also includes a choke arrangement 26.

As can be seen from Figure 1, the wheel 6 is horizontally mounted in the container 8. The rotator means 20 comprises a turntable and drive motor. The control means includes a drive motor speed control device 28.

The temperature indicator means 18 is a temperature sensor positioned inside the container 8. More than one of the temperature sensors may be employed if desired.

The generator means 16 comprises a magnetron 30 and a wave guide 32. The generator means 16 also comprises a microwave power supply unit 34 which is powered by an AC or DC supply 36.

When the container 8 is closed, the wheel 6 is able to be rotated via the mounting means 10 and the rotator means 20. The application of high frequency energy warms the tyre until the tyre reaches a predetermined temperature. At the predetermined temperature, the generator means 16 can either be switched off, or it can be controlled to emit a lower level of the electromagnetic energy for the maintenance of the predetermined temperature.

Referring now to Figure 2, there is shown alternative apparatus 38 to that shown in Figure 1. The lower part of the apparatus 38 is the same as the lower part of the apparatus 2, as indicated in Figure 2.

In Figure 2, similar parts as in Figure 1 have been given the same reference numerals for ease of comparison and understanding. In Figure 2, the magnetron 30 and the wave guide 32 used in Figure 1 have been

replaced by microwave generating solid state components in a high frequency power supply unit 40. Also, a feed system comprising tuning stubs and microwave antenna arrays 42 are positioned within the container 8.

Figure 3 shows apparatus 44 in which similar parts as in previous Figures have again been given the same reference numerals. In Figure 3, the apparatus 44 is such that the dimensions of the container 8 are less frequency wavelength dependent. This has allowed the use of a radio frequency electrode or electrodes 46 to be placed directly adjacent the surface of the tyre 4. The metal hub 12 or a separately independent structure may be used as the radio frequency electrode or electrodes 46. A radio frequency power supply matching and control unit 48 is employed.

Figure 4 shows apparatus 50 which is like the apparatus 44 shown in Figure 3 except that the radio frequency electrode 46 which was the hub in Figure 3 is now radio frequency electrodes 52, which may be either separate plates or a circular applicator.

It is to be appreciated that the embodiments of the invention described above with reference to the accompanying drawings have been given by way of example only and that modifications may be effected.

**CLAIMS**

1. Apparatus for warming a tyre on a wheel to a temperature required for vehicle racing, which apparatus comprises a container in which the tyre is heated, mounting means which is positioned in the container and on which the wheel is mounted, generator means for generating electromagnetic energy of a frequency that heats the tyre, temperature indicator means for indicating the temperature of the tyre, and control means for controlling the operation of the apparatus such that the tyre is controllably heated to a temperature required for vehicle racing.
2. Apparatus according to claim 1 and including rotator means for rotating the wheel in order to ensure even heating of the tyre in the container.
3. Apparatus according claim 1 or claim 2 in which the container is of a size suitable for receiving only one wheel at a time.
4. Apparatus according to any one of the preceding claims in which the container is constructed for quick opening in order to provide ease of access to the wheel to facilitate speedy insertion and removal of the wheel from the container as may be required during racing conditions.

5. Apparatus according to claim 4 in which the container comprises a body and a door which allows full access to the inside of the body.
6. Apparatus according to any one of the preceding claims in which the container is a circular container.
7. Apparatus according to any one of the preceding claims in which the mounting means includes studs on which the wheel is placed.
8. Apparatus according to any one of the preceding claims in which the wheel is horizontally mounted in the container.
9. Apparatus according to any one of claims 1 – 7 in which the wheel is vertically mounted in the container.
10. Apparatus according to any one of the preceding claims in which the generator means is for generating microwave energy as the electromagnetic energy.
11. Apparatus according to any one of claims 1 – 9 in which the generator means is for generating radio frequency energy as the electromagnetic energy.

12. Apparatus according to any one of the preceding claims and in which metal components form an active part of the apparatus.

13. Apparatus according to any one of the preceding claims and which is constructed to be portable.

14. Apparatus for warming a tyre on wheel to a temperature required for vehicle racing, substantially as herein described with reference to the accompanying drawings.

ABSTRACTAPPARATUS FOR WARMING A TYRE ON A WHEEL  
TO A TEMPERATURE REQUIRED FOR VEHICLE RACING

Apparatus (2) for warming a tyre (4) on a wheel (6) to a temperature required for vehicle racing, which apparatus (2) comprises a container (8) in which the tyre (4) is heated, mounting means (10) which is positioned in the container (8) and on which the wheel (6) is mounted, generator means (16) for generating electromagnetic energy of a frequency that heats the tyre (4), temperature indicator means (18) for indicating the temperature of the tyre (4), and control means for controlling the operation of the apparatus (2) such that the tyre (4) is controllably heated to a temperature required for vehicle racing.

1/2

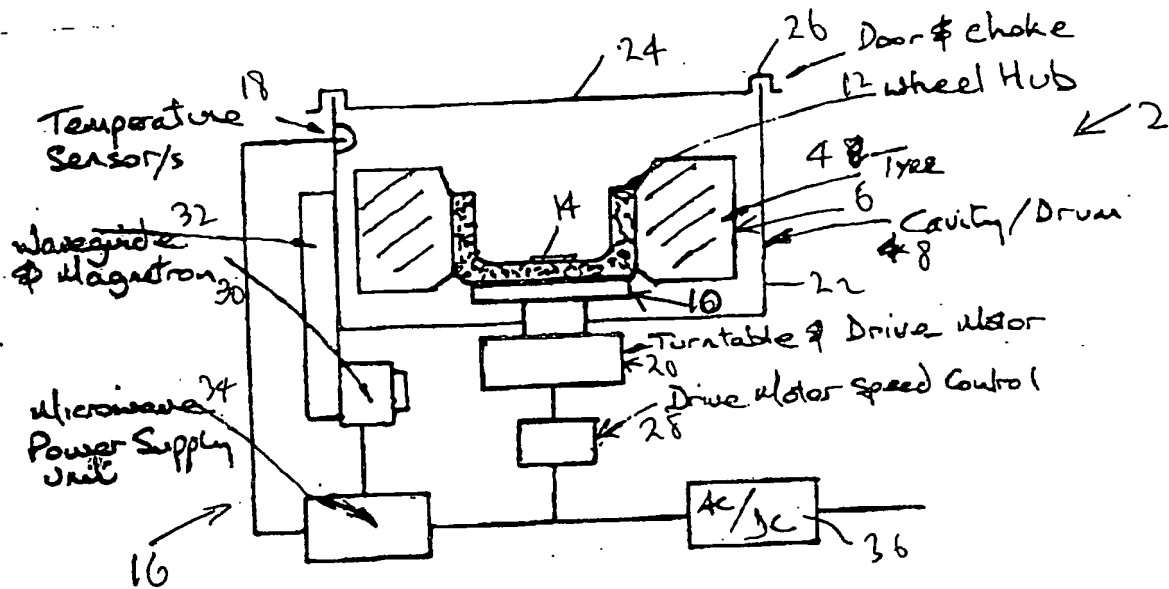


FIG 1

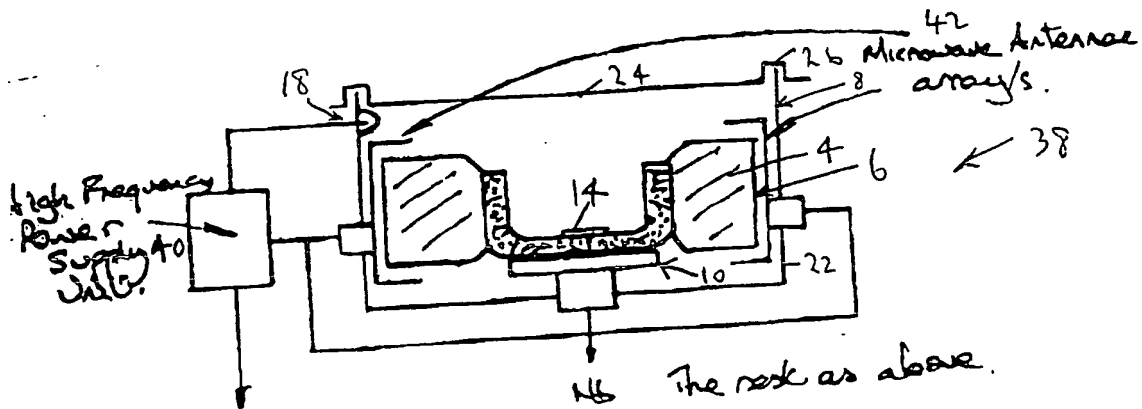


FIG 2



2/2


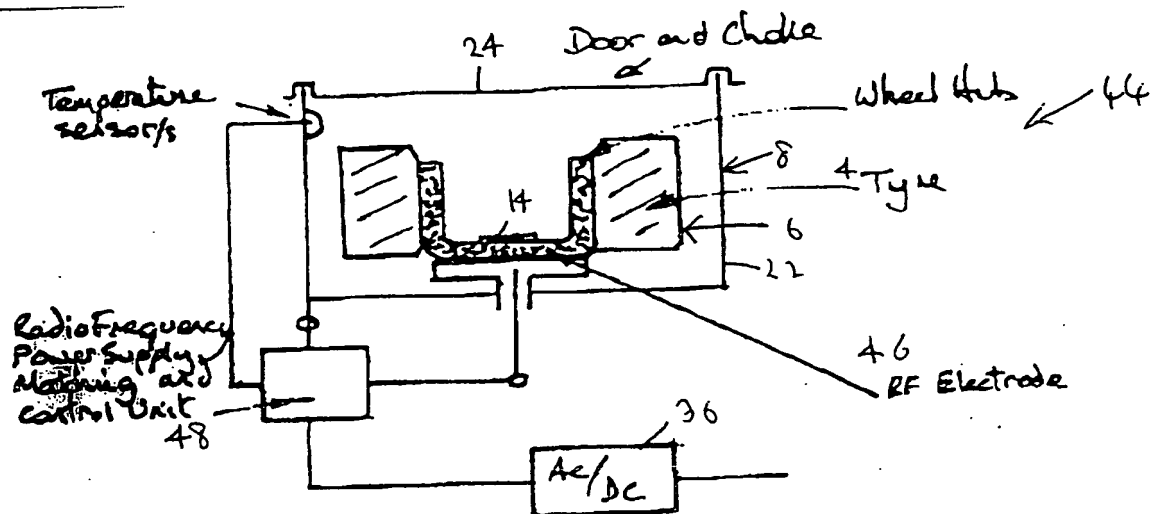


FIG 3

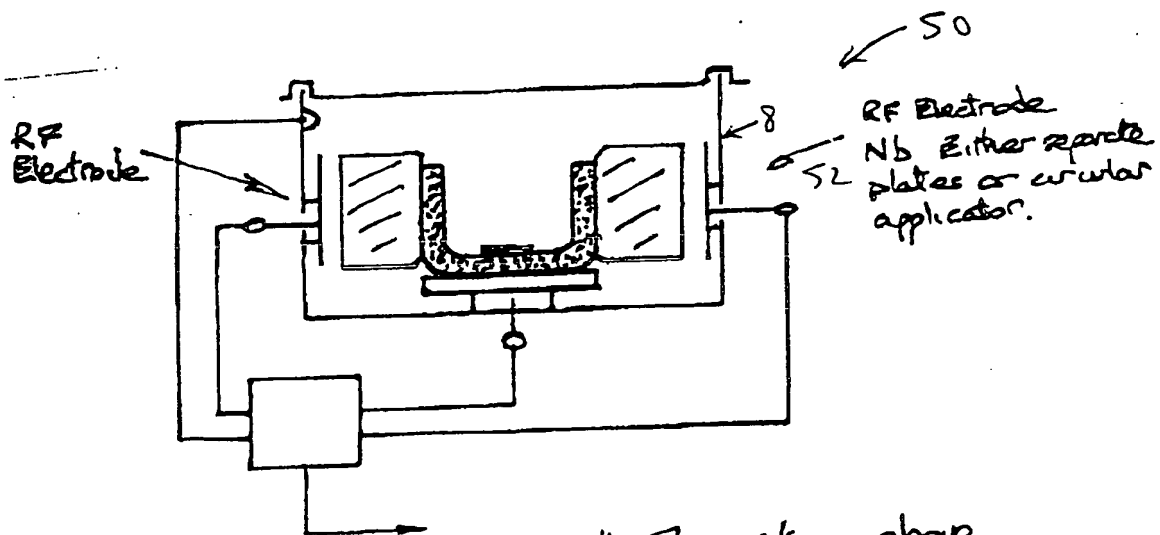

Nb The rest as above.

FIG 4

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**